

LED Warning Light ONN-M4-50

Introduction:

1. Traditional design, 3 layers, 3 colors.
2. Buzzer optional, volume louder than 85dB.
3. High brightness LED chip, long lifetime and low decay.
4. Three kinds of base are available, easy to install.
5. Pole length can be customized.

Application: CNC machine, Automatic equipment , SMT equipment etc.

Warranty: 2 years


Certification: CE, RoHS, FCC

Ordering code:

ONN - M4	<u>3</u>	<u>A</u>	<u>B</u>	<u>B</u>	<u>I</u>	<u>RYG</u>	<u>50</u>
	1	2	3	4	5	6	7
1.Layer	1: Single layer, 2: Two layers, 3:Three layers						
2. Mounting type	A: Foldable type, C: Pole and plate, E: L bracket						
3. Voltage	A: DC12V, B: DC24V, C: AC100-240V(50/60Hz)						
4.Function	B: Steady, F: Steady with buzzer, S: Red flash, C: Red flash with buzzer, D: All flash, E: All flash with buzzer						
5.Connect type	C: contact type, T: PNP& NPN						
6. Color	R: Red, Y: Yellow, G:Green						
7. Diameter	50: ϕ 50mm						

Parameter:

Power	1.4W for each color
Input voltage	DC12V, DC24V, AC100-240V(50/60Hz)
Current	60-70mA for each color
Working Temperature	-20~45°C
IP rating	IP53
Buzzer volume	>85dB
Material	PC lens and ABS body
Lifetime	50,000 hours
Installation	Fixed by screw or bracket

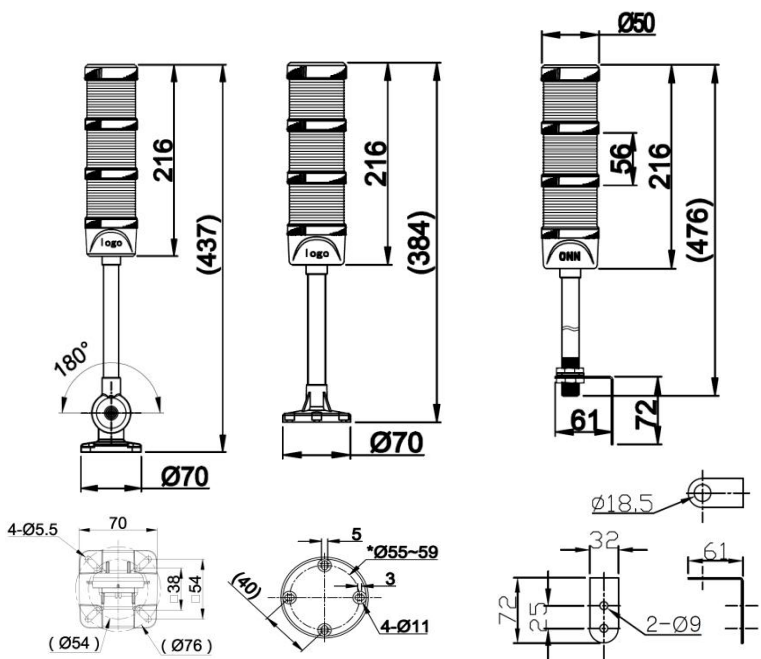


A. Foldable type

C. Pole and plate type


E. L bracket type

Wiring instruction:

PNP & NPN

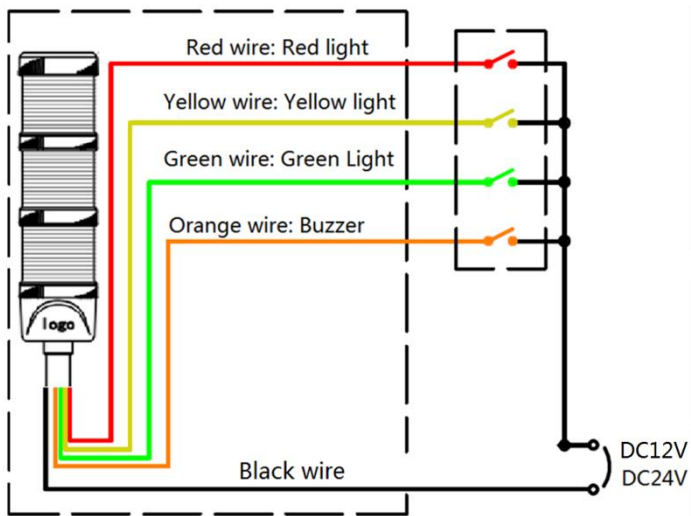

Contact type

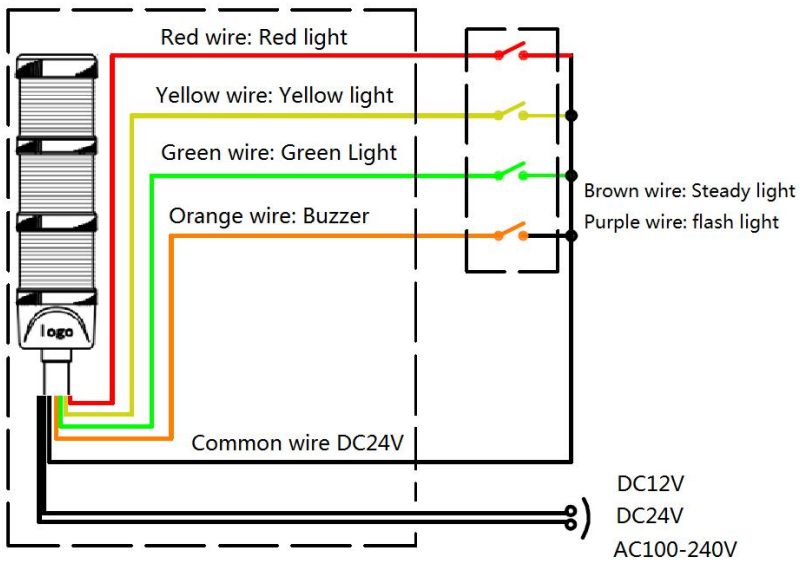

Package info.:

Item No.	Qty/carton	Carton size	Total NW.	Total GW.
M4-50-3 layers	12 pieces	440*270*350mm	5.4kg	7.6kg
M4-4 layers	12 pieces	580*280*233mm	6kg	7.6kg

